

GCM-602

Written by Administrator

Saturday, 31 August 2013 09:44 - Last Updated Monday, 24 June 2019 09:18




{rokbox}images/stories/602v3.jpg{/rokbox} {rokbox}images/stories/602v1.jpg{/rokbox} {rokbox}images/stories/602v2.jpg{/rokbox}

SPECIFICATIONS

Nominal diameter	: 165mm. 6"
Nominal Impedance	: 4 ohm.
Program Power	: 100w.
Frequency range	: 45Hz. – 4KHz.
Voice coil diameter	: 35.5mm.
Magnet dimension	: 100mm. x 50mm. x 15mm.

Sensitivity 1W / 1 M. : 97 db.

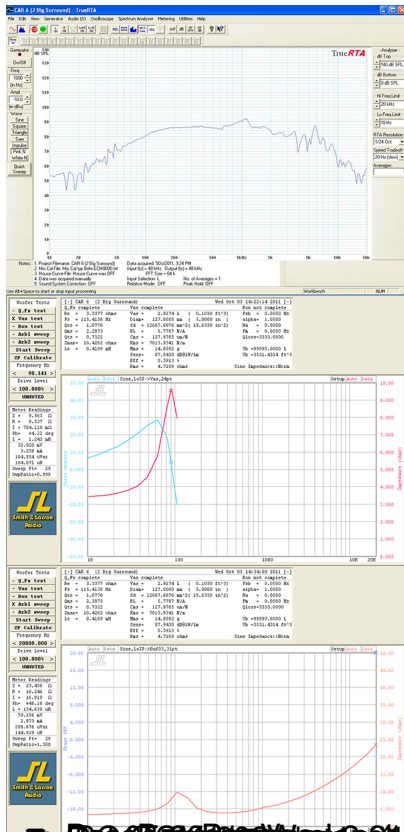

For more information on our expert digital signal processing software, please visit our website at www.jlsoftware.com